


TIPO-TYPE PR

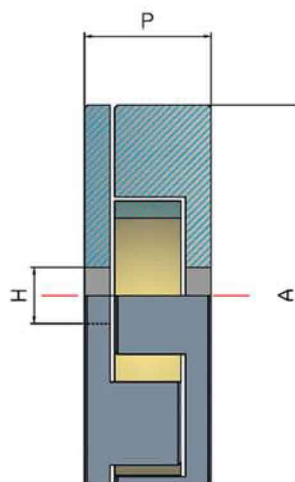

STEEL-ACIER-ACERO

LOS ACOPLAMIENTOS ESTAN DISPONIBLES MECANIZADOS CON EJE, CHAVETERO Y OTRAS ESPECIFICACIONES BAJO PLANO EN UN PLAZO MÍNIMO
FINISHED COUPLINGS WITH BORE, KEYWAY AND OTHER SPECIFICATIONS UNDER DRAWING ARE AVAILABLE IN A SHORT TIME
ACCOUPLLEMENTS SONT DISPONIBLE AVEC ALESE, RAINURE DE CLAVETE ET AUTRES SPÉCIFICATIONS SOUS PLAN DANS UN DÉLAI MINIMAL

TIPO TYPE	ESTRELLA SPIDER BAGUE	Ø Int.Estrella Ø Spider Inside Ø Intérieur Bague	PAR TORQUE Kgm	MÁX. R.P.M.	HP / RPM	A	P	H	Peso Weight Poids
									Kgs.
PR-75	75x16	31	VER INFORMACION EN TABLA DE ESTRELLAS SEE INFORMATION IN TABLE OF SPIDERS BELOW VERIFIER LES INFORMATIONS CONTENUES DANS LE TABLEAU DES BAGUES BAS	7.000	0,007	75	27	37	0,51
PR-90	90x20	37		6.000	0,015	90	32	37	0,85
PR-105	105x20	49		5.500	0,027	105	36	19	1,5
PR-120	120x20	47		4.500	0,041	120	38	23	2,2
PR-135	135x25	55		4.000	0,063	135	43	23	3,3
PR-150	150x28	63		3.500	0,088	150	48	26	4,3
PR-175	175x32	67		3.000	0,13	175	56	26	6,7
PR-200	200x35	71		2.750	0,189	200	61	26	10
PR-245	245x40	120		2.500	0,682	245	80	35	17
PR-300	245x40	168		1.800	1,117	300	96	35	28

ATEX



CERTIFICADO ATEX IM2, IIGD2
ATEX CERTIFICATES IM2, IIGD2
CERTIFICATS ATEX IM2, IIGD2

LOS ACOPLAMIENTOS ALBERT ESTÁN CERTIFICADOS CONFORME A
ALBERT COUPLING ARE CERTIFIED IN ACCORDANCE WITH
LA ACCOUPLEMENTS ALBERT SONT CERTIFIÉS CONFORMES À
FABRICACION DE ACOPLAMIENTOS ELÁSTICOS SIN SOLDADURA PARA TRANSMISIÓN DE POTENCIA

ISO 9001

BUREAU VERITAS
Certification
ESPMDD0003187

