


TIPO-TYPE INOX-TCI



STAINLESS STEEL-ACIER INOXYDABLE-ACERO INOXIDABLE 316L

TIPO/ TYPE	ACOPLAMIENTO / COUPLING / ACCOUPLEMENT									TAPER
	ESTRELLA SPIDER BAGUE	Ø Int.Estrella Ø Spider Inside Ø Itérieur Bague	PAR TORQUE Kgm	MÁX.R.P.M.	HP/RPM	A	P	G	I	
INOX TCI-75	75X16	31	VER INFORMACION EN TABLA DE ESTRELLAS SEE INFORMATION IN TABLE OF SPIDERS BELOW VERIFIER LES INFORMATIONS CONTENUES DANS LE TABLEAU DES BAGUES BAS	6.000	0,007	75	64	52	18,5	1108
INOX TCI-90	90X20	37		5.000	0,015	90	74	64	21	1210
INOX TCI-105	105X20	49		4.800	0,027	105	75	75	19,5	1610
INOX TCI-120	120X20	47		4.000	0,041	120	87	89	24,5	2012
INOX TCI-150	150X28	63		3.500	0,088	150	120	110	34	2517

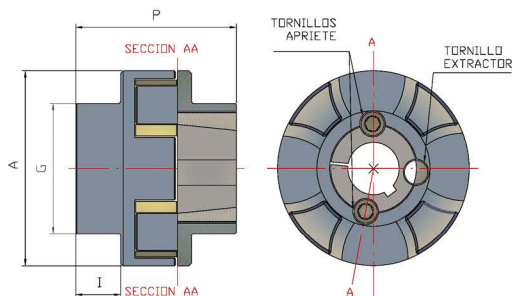

PREPARADOS PARA REALIZAR CUALQUIER
MECANIZADO SOBRE ELLOS

PREPARED TO PERFORM ANY MACHINING ON THEM

PRÊT À EFFECTUER TOUT USINAGE SUR EUX



MECANIZACIONES DE EJES Y CHAVETEROS
ESTÁNDAR Y A MEDIDA

STAINLESS STEEL-ACIER INOXYDABLE-ACERO INOXIDABLE

TAPER LOCK / TAPER BUSH STAINLESS STEEL - ACIER INOXYDABLE - ACERO INOXIDABLE			
TAPER LOCK / TAPER BU SH	Long. / Lenght / Longueur	Ejes disponibles / Available bores / Alésages disponibles	Prisioneros / Screw / Vis
1108	22,5	11-12-14-15-16-17-18-19-20-21-22-24-25-28	1/4
1210	25,5	12-14-15-16-17-18-19-20-21-22-24-25-28-30-32	3/8
1610	25,5	14-15-16-17-18-19-20-21-22-24-25-28-30-32-35-38-40-42	3/8
2012	32	15-16-17-18-19-20-21-22-24-25-28-30-32-35-38-40-42-45-48-50	7/16
2517	45	19-20-21-22-24-25-28-30-32-35-38-40-42-45-48-50-55-60-65	1/2
3020	51	25-28-30-32-35-38-40-42-45-48-50-55-60-65-70-75	5/8

ATEX



CERTIFICADO ATEX IM2 , IIGD2
ATEX CERTIFICATES IM2 , IIGD2
CERTIFICATS ATEX IM2 , IIGD2

LOS ACOPLAMIENTOS ALBERT ESTÁN CERTIFICADOS CONFORME A
ALBERT COUPLING ARE CERTIFIED IN ACCORDANCE WITH
LA ACCOUPLEMENTS ALBERT SONT CERTIFIÉS CONFORMES À
FABRICACION DE ACOPLAMIENTOS ELÁSTICOS SIN SOLDADURA PARA TRANSMISIÓN DE POTENCIA



ESPMDD003187