


SERIE SERIES SÉRIE XBRI



TIPO-TYPE BRI

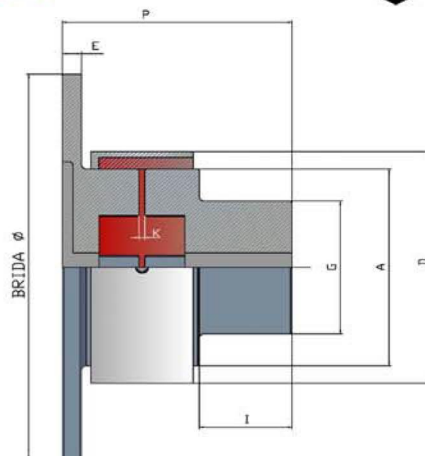


STEEL-ACIER-ACERO

LOS ACOPLAMIENTOS ESTAN DISPONIBLES MECANIZADOS CON EJE CHAVETERO Y OTRAS ESPECIFICACIONES BAJO PLANO EN UN PLAZO MÍNIMO
FINISHED COUPLINGS WITH BORE, KEYWAY AND OTHER SPECIFICATIONS UNDER DRAWING ARE AVAILABLE IN A SHORT TIME
ACCOUPLLEMENTS SONT DISPONIBLE AVEC ALESE, RAINURE DE CLAVETE ET AUTRES SPÉCIFICATIONS SOUS PLAN DANS UN DÉLAI MINIMAL

TYPE	ESTRELLA SPIDER BAGUE	PAR TORQUE Kgm	MÁX B.P.M.	A	Ø BRIDA	P	G	I	D	E	K	Ejes /Bores /Alésages		Peso Weight Poids
												Min.	Max.	Kgs.
X BRI-75	X75	VER INFORMACION EN TABLA DE ESTRELLAS SEE INFORMATION IN TABLE OF SPIDERS BELOW VERIFIER LES INFORMATIONS CONTENUES DANS LE TABLEAU DES BAGUES BAS	6.000	75	130	88	50	36,1	92	8	2	13	34	2,2
					150									2,5
					170									2,8
X BRI-90	X90		5.000	90	150	106	65	46	108	8	2	13	45	3,8
					170									4,1
					200									4,6
X BRI-105	X105		4.500	105	180	120,5	72	53	125	12	2	0	48	6,5
					210									7,4
					250									7,9
X BRI-120	X120		4.000	120	200	133	80	60	142	14	2	0	55	8,9
					250									10,9
					300									13,4
X BRI-150	X150		3.000	150	230	171,5	100	80	175	15	2,5	0	70	15,7
					280									17,2
					350									22,2


ESTRELLA SPIDER BAGUE X

ESTRELLA SPIDER BAGUE	A	B	M	F
X50	50	57	28	21
X60	50	69	34	29
X75	60	86	45	33,5
X90	60	102	50	41,5
X105	60	118	60	43,5
X120	75	135	65	43,5
X135	75	151	74	52
X150	75	167	82	58



ANILLO RING ANNUE X

ANILLO RING ANNUE	D	B	F	PRISIONEROS SCREW VIS
X50	62	57	22	2 M-5
X60	74	69	30	2 M-5
X75	92	86	35	2 M-6
X90	108	102	43	2 M-6
X105	125	118	45	2 M-8
X120	142	135	45	2 M-8
X135	159	151	54	2 M-8
X150	175	167	60	2 M-8

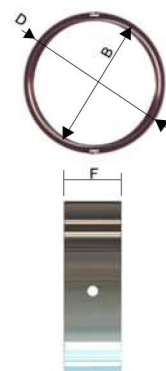

ATEX



CERTIFICADO ATEX IM2, IIGD2
ATEX CERTIFICATES IM2, IIGD2
CERTIFICATS ATEX IM2, IIGD2

LOS ACOPLAMIENTOS ALBERT ESTÁN CERTIFICADOS CONFORME A
ALBERT COUPLING ARE CERTIFIED IN ACCORDANCE WITH
LA ACCOUPLEMENTS ALBERT SONT CERTIFIÉS CONFORMES À
FABRICACION DE ACOPLAMIENTOS ELÁSTICOS SIN SOLDADURA PARA TRANSMISIÓN DE POTENCIA

